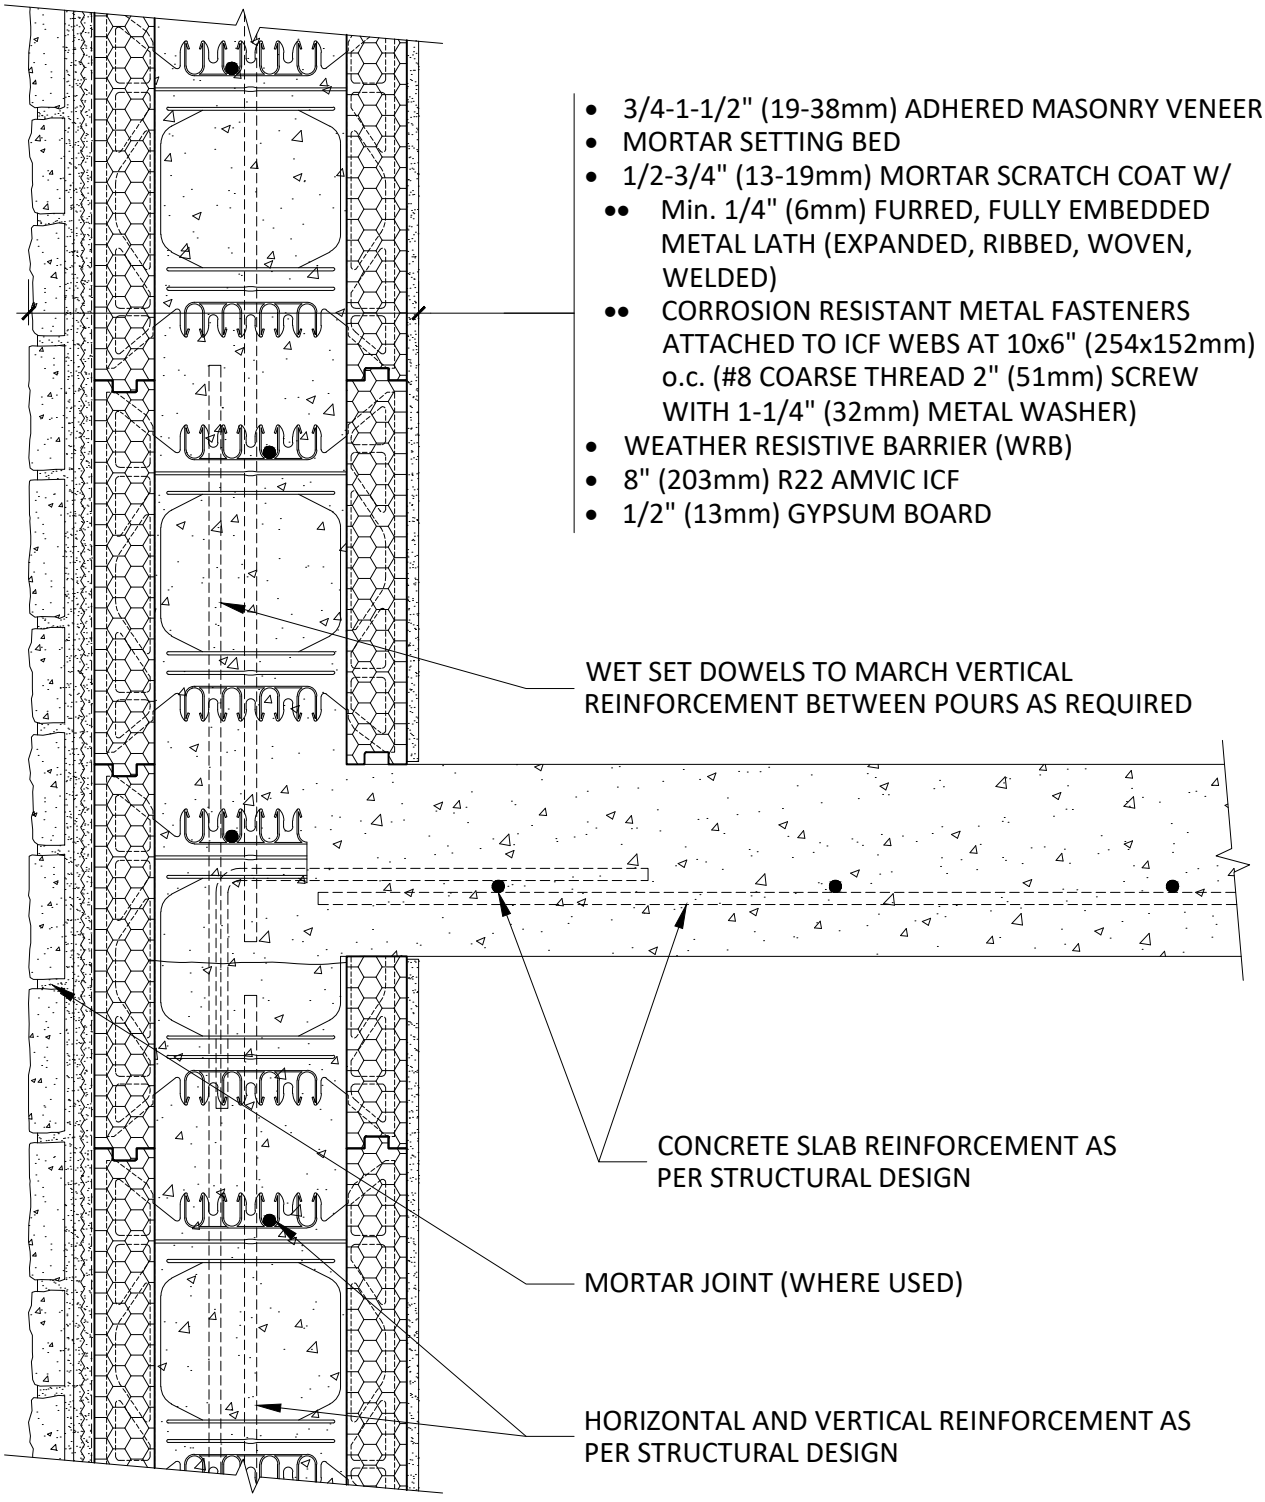


- 3/4-1-1/2" (19-38mm) ADHERED MASONRY VENEER
- MORTAR SETTING BED
- 1/2-3/4" (13-19mm) MORTAR SCRATCH COAT W/
  - Min. 1/4" (6mm) FURRED, FULLY EMBEDDED METAL LATH (EXPANDED, RIBBED, WOVEN, WELDED)
  - CORROSION RESISTANT METAL FASTENERS ATTACHED TO ICF WEBS AT 10x6" (254x152mm) o.c. (#8 COARSE THREAD 2" (51mm) SCREW WITH 1-1/4" (32mm) METAL WASHER)
- WEATHER RESISTIVE BARRIER (WRB)
- 8" (203mm) R22 AMVIC ICF
- 1/2" (13mm) GYPSUM BOARD

8" R22 AMVIC™ ICF WITH ADHERED MASONRY VENEER

Alleguard
1(877) 470-9991 alleguard.com

20 December 2023

ALL DETAILS SHALL BE CONSTRUCTED IN ACCORDANCE WITH LOCAL BUILDING CODE AND CLIMATIC ZONE REQUIREMENTS. THE FOLLOWING INFORMATION IS PROVIDED AS A GUIDELINE ONLY AND CAN BE CHANGED WITHOUT NOTICE BY ALLEGUARD.